(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date 17 June 2004 (17.06.2004)

PCT

(10) International Publication Number WO 2004/049887 A1

(51) International Patent Classification⁷: 5/36, 9/32

A47L 9/00,

(21) International Application Number:

PCT/GB2003/005189

- (22) International Filing Date: 2 December 2003 (02.12.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0228153.3

3 December 2002 (03.12.2002) GB

- (71) Applicant: TECHTRONIC INDUSTRIES COMPANY LIMITED [CN/CN]; 24/F CDW Building, 388 Castle Peak Road, Tsuen Wan, N.T. (CN).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ELSWORTHY, Christopher, Thomas [GB/GB]; 7 Magnolia Court, Fiddlers Green, Cheltenham GL51 0XB (GB). PROUD, Reuben [GB/GB]; 52 Gillam Street, Worcester WR3 8JT (GB). IVARSSON, Bengt, Ivar, Anders [SE/SE]; 27


Park Road, Bearwood, Smethwick, Birmingham B67 5HP (GB).

- (74) Agent: FORRESTER KETLEY & CO; Chamberlain House, Paradise Place, Birmingham B3 3HP (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report

[Continued on next page]

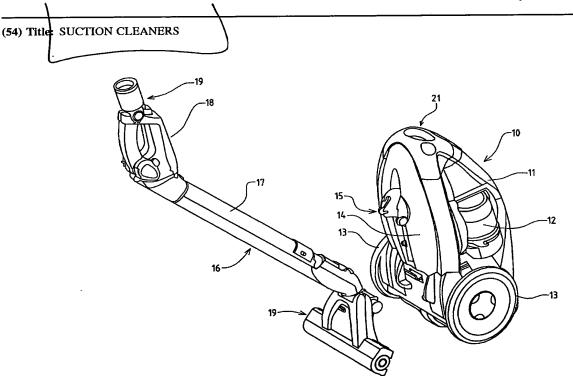

(57) Abstract: A suction cleaner of the cylinder type comprising a main unit (10) including a source of suction and a dust separating/collecting means; a flexible hose; a wand (17); and a cleaning head (19); wherein the main unit (10) is able to be stood on its end and there is releasable catch means providing for the wand (17) with cleaning head (19) attached to be releasably connected to the main unit (10).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.